


Externally Adjustable Relief Valve

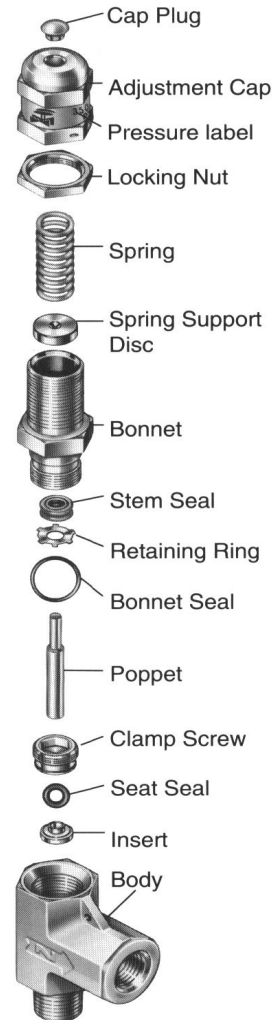

Spring Ratings	Part Number
3.4 – 24 Bar	1647/1648
24 – 51 Bar	1647/1649
51 – 103 Bar	1647/1650
103 – 155 Bar	1647/1651
155 – 207 Bar	1647/1652
207 – 275 Bar	1647/F
275 – 345 Bar	1647/G
345 – 414 Bar	1647/H

Specifications:-

Wetted Parts:	316L Stainless Steel
Spring:	17 - 7 ph Stainless Steel
Seals:	Viton – Standard – Buna N, Neoprene, & Ethylene Propylene
Working Pressure:	414 Bar (551 During Relief)
Cracking Pressure:	Adjustable 3.4 – 414 Bar
P Max. Outlet:	103 Bar