


Pressure Testing Pump Sets

Data sheet 111 GP 02



Pressure Testing Pump Set with 18 Litre Holding Tank

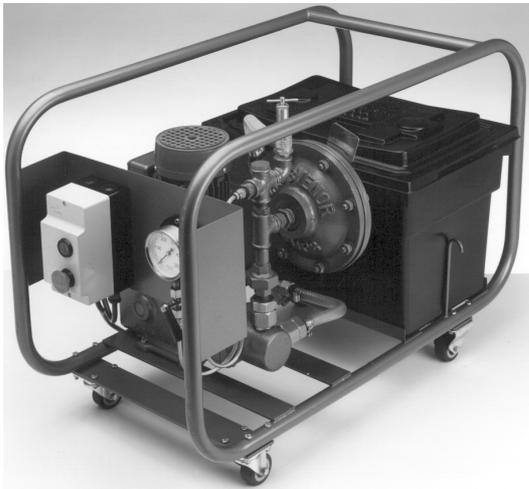

Pressure Testing Pump Set

Compact, self contained, fully portable pressure testing pump sets fitted with electrically driven positive displacement pump and starter. Two types are available, either with or without polythene holding tank, both versions being fitted with suction connection strainer. The standard frame is made from steel tube for maximum strength/weight ratio for portability. All units are fitted with adjustable pressure relief valve with return, pulsation damper and pressure gauge with cock.


Specifications:

- **Applications:** - The units are design for hydraulic pressure testing of all types of pipe systems, pressure vessels, boilers, etc. Typical tests are manufacturers routine tests, witness tests prior to despatch, initial installed tests and annual tests for insurance surveys. etc.
- **Pumps:** - The standard unit utilizes the Grosvenor Pygme pump of proven reliability and availability in a range of flow rates and pressures. Units can also be fitted with other pumps from the Grosvenor range giving pressures up to 3600 PSI (250Bar) if required.
- **Electrical** - Pumps are fitted with electric motors available from stock wired for standard 415 volt three phase, 240 volt single phase or 110 volt single phase. Other types are available to order. All units are complete with D.O.L. contactor type starter.
- **Optional Extras:** - All units can be fitted with wheels or casters to assist moving. Tank ball valves and flexible hoses are also available.

Our policy is to continually develop and improve our products and we therefore reserve the right to modify pumps shown in this brochure without notice.

Overall dimensions
(with 18 Ltr. tank) 100
x 40 x 50 cm

Weight (Typical) 50

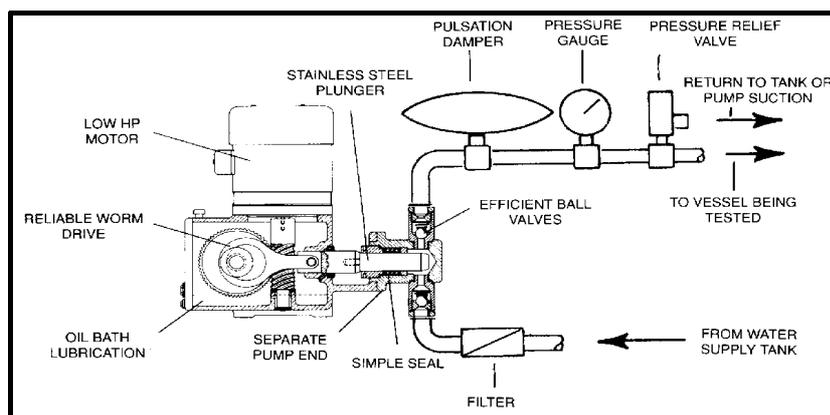

Overall dimensions
(without tank) 51 x 27x
52 cm

Weight (Typical) 33 kg.