


DRAWING NUMBER: RG634/A3/6

PUMP SIZE	PORT SIZE BSP	DIMN 'B'	FLOW L/H	PRESSURE BAR				
				3 kW	4 kW	5.5 kW	7.5 kW	11 kW
1" x 3"	1/2"	286	272	66	91	124	165	248
1-1/8" x 3"	3/4"	382	318	54	74	103	137	206
1-1/4" x 3"	3/4"	386	430	44	63	86	115	173
1-3/8" x 3"	3/4"	388	477	40	51	70	92	140
1-1/2" x 3"	3/4"	392	568	34	43	59	79	118
1-5/8" x 3"	3/4"	396	680	28	35	49	66	99
1-3/4" x 3"	3/4"	398	795	24	29	40	55	84
1-7/8" x 3"	1"	402	910	21	26	37	49	74
2" x 3"	1"	404	1110	18	22	31	42	64
2" x 3-7/16"	1"	404	1180	16	21	29	39	59
DIMN 'A'				660	674	724	724	859

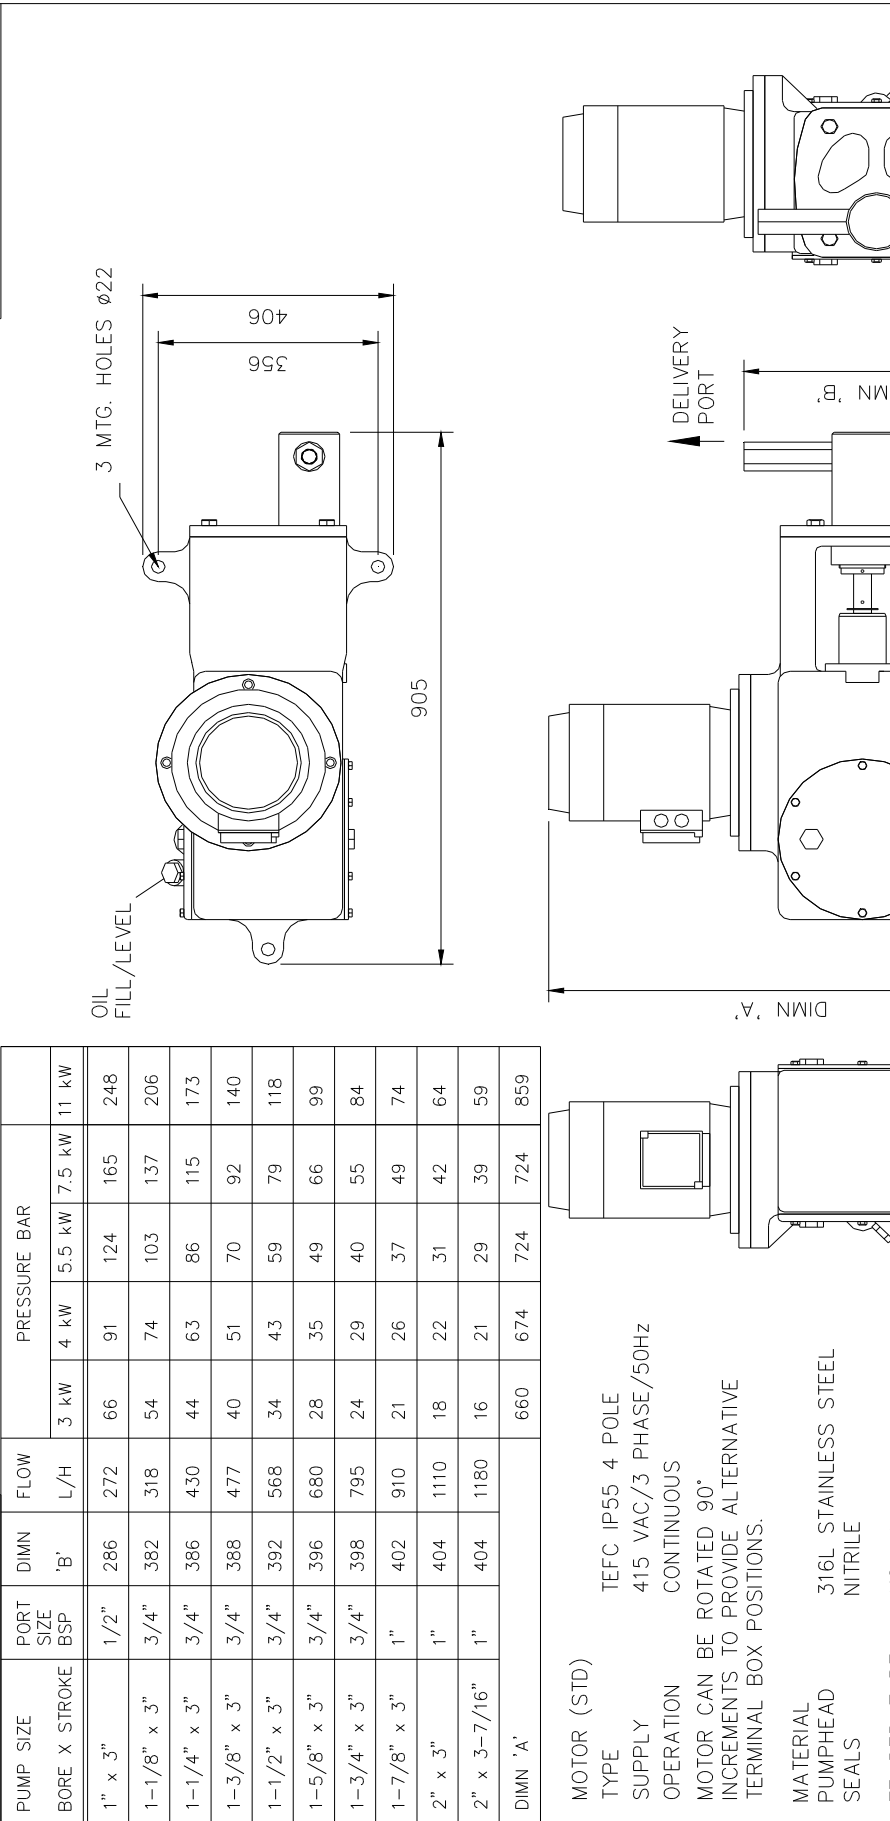

PROJECTION

3 MTG. HOLES Ø22

OIL FILL/LEVEL


DELIVERY PORT

SUCTION PORT

OIL DRAIN

MOTOR (STD)
TYPE: TEFC IP55 4 POLE
SUPPLY: 415 VAC/3 PHASE/50HZ
OPERATION: CONTINUOUS
MOTOR CAN BE ROTATED 90° INCREMENTS TO PROVIDE ALTERNATIVE TERMINAL BOX POSITIONS.
MATERIAL: 316L STAINLESS STEEL
PUMP HEAD SEALS: NITRILE
TEMPERATURE: 1°C MIN. - 100° MAX. - 316L
WEIGHT: 150 KG

DATA SHOWN IS FOR STANDARD ASSEMBLY ONLY.
CONTACT GROSVENOR PUMPS FOR FULL DETAILS

SHEET 1 OF 1	TITLE: HPL PLUNGER PUMP INSTALLATION DETAILS
	
<p>FILE: \PUMP\HPI\INST\RG634</p> <p>DIMENSIONS IN MM</p> <p>ORIGINAL SCALE - 1:8</p>	